


AM POST PROCESSING  
**PPT**



© SPALECK ENGINEERING

**Automatic post processing  
of additive manufactured parts**

Maximum flexibility for the post processing of different AM parts. Two independently operating tubs allow simultaneous smoothing and polishing. Intelligent control and automatic media return minimize operator intervention. Independence of location of the plant thanks to an integrated waste water treatment.



MADE IN GERMANY



# AM POST PROCESSING PPT

## Technical specifications:

- Soundproofed standalone unit with integrated waste water treatment system
- High automation degree thanks to intelligent system control\*
- Integrated separation unit with automatic media return\*
- Continuous adjustment of the processing intensity
- Two individually driven tubs
- Special rubber lining for ball burnishing applications

## Optional specifications:

- Chamber division for gentle individual treatment
- Use of different motors for simultaneous smoothing and polishing

\*only PPT80

## Technical data:


Description		PPT80	PPT80S
Working tub volume	l	2 x 40	2 x 40
Operating voltage	V   Hz	400   50	400   50
Drive power	kW	1,1   2,2	1,1   2,2
Motor speed	U <sub>pm</sub>	1500   3000	1500   3000
Empty weight basic machine	kg	1400	450
Space requirement basic machine	m <sup>2</sup>	3,4	2,1

## Dimensions working tub in mm


Description		PPT80	PPT80S
Length working tub	A	790	790
Width working tub	B	210	210
Height working tub	C	255	255

## Dimensions basic machine in mm

Description		PPT80	PPT80S
Length machine		2410	1890
Width machine		1420	1060
Height machine		2250	930
Top edge working tub		1000	900

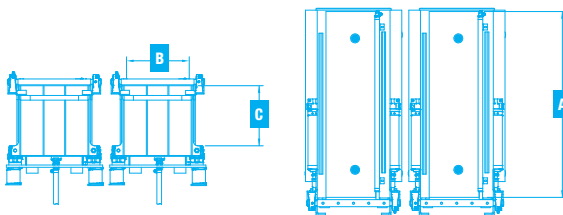

## Automatic media return PPT80

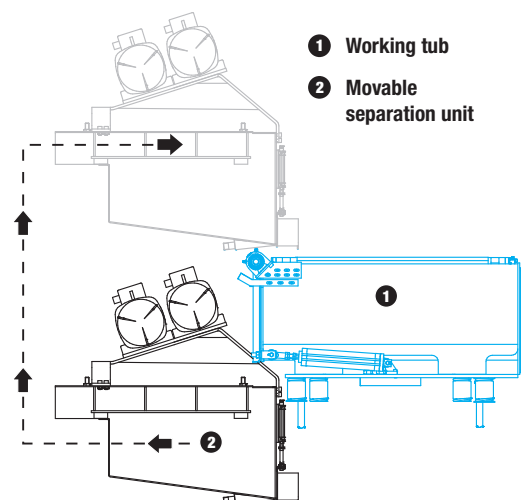

© SPALECK ENGINEERING